

STYLE COLLECTION


WALL

STYLE COLLECTION | WALL

SIZES


One-sided structure: approx. 45 mm thick

RECTANGULAR

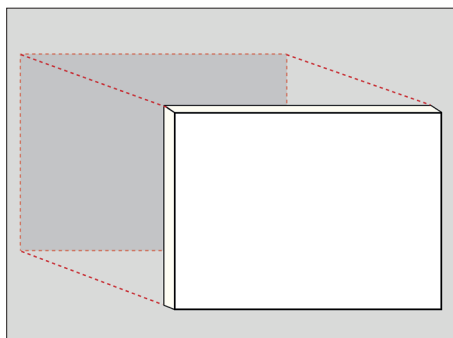

50x70 cm
70x100 cm
100x140 cm
140x200 cm

CIRCULAR

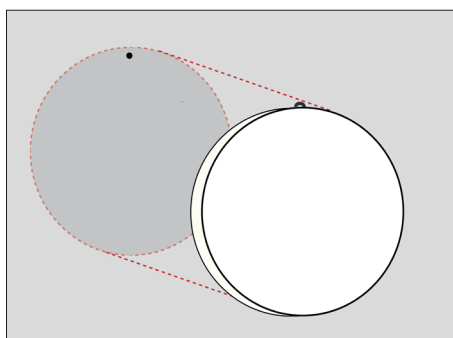

diameter 45 cm
diameter 65 cm
diameter 85 cm
diameter 125 cm




FINISHES AVAILABLE

BLACK&WHITE


- The **Black&White** panel retains its original form, leaving the colour of the fibre, white or black, visible.

**ORIGINAL**

- The **Original** white or black fibre panel is printed with images, graphics or photos. The colour of the fibre is visible along the edges.

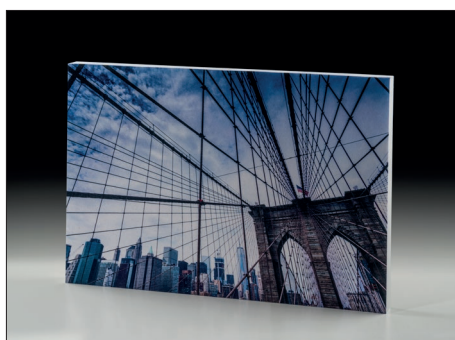**PANTONE®**

- The **Pantone®** panel is printed in a solid colour from the infinite Pantone® colour range. The colour of the fibre is visible along the edges.

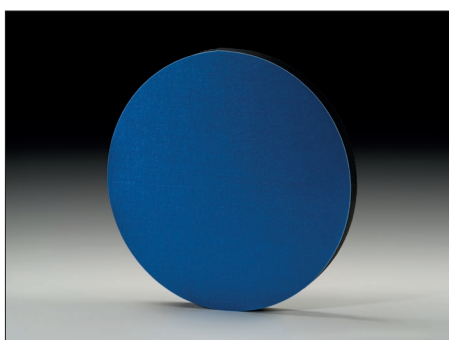**NOTE**

The customer-supplied images will be adapted to the panel format through a machining process, which may result in slight variations in framing. **To ensure an optimal result, keep graphics, text and subjects of primary interest at least 5–7 cm from the outer edge.**

FLAME RESISTANCE

Euroclasse B-s2,d0

VOLATILE ORGANIC COMPOUND EMISSION

VOC A+

Indoor Air Comfort GOLD



CAM REQUIREMENTS

Complies with the requirements defined by CAM Edilizia for acoustic and thermal insulation materials regarding the demand for high acoustic absorption performance, recycled content percentage, and the absence of hazardous substances.



REMADE IN ITALY CERTIFICATE

REMADE IN ITALY certification is an ACCREDIA-accredited product certification that verifies the recycled content incorporated into each product. This certification is accepted during bidding and awarding phases, in compliance with public procurement regulations and Minimum Environmental Criteria (MEC) requirements.



100% RICICLABILE



ECO-FRIENDLY

ENVIRONMENTAL PROTOCOLS

Contributes to earning credits for the main environmental building certifications, such as the LEED, BREEAM, WELL, and ITACA protocols.

SHORT SUPPLY CHAIN

The entire lifecycle is managed within Italy, significantly reducing the environmental impact associated with transportation of raw materials, semi-finished products, and the final product.



MADE BY ITALIANS

HI-TECH MATERIALS

Style Collection solutions are made of 100% ISOLFIBTEC®, a special polyester fibre that is completely non-toxic and non-allergenic, obtained from recycled PET. It is a material with a high sound absorption coefficient, environmentally friendly and long-lasting. The ISOLFIBTEC® structure can then be customised by choosing from Black&White, Original or Pantone® finishes.



Every square meter of ISOLFIBTEC® is produced by recycling 39 PET bottles

CE MARKING


Isospace Style Wall solutions have CE marking in accordance with UNI EN 15102 standards.



SOUND ABSORPTION

Sound absorption measured in reverberation chamber (UNI EN ISO 354)

f [Hz]	α_p [-]
Frequency	Practical sound absorption coefficient values
125	0,25
250	0,65
500	1,00
1000	1,00
2000	1,00
4000	1,00

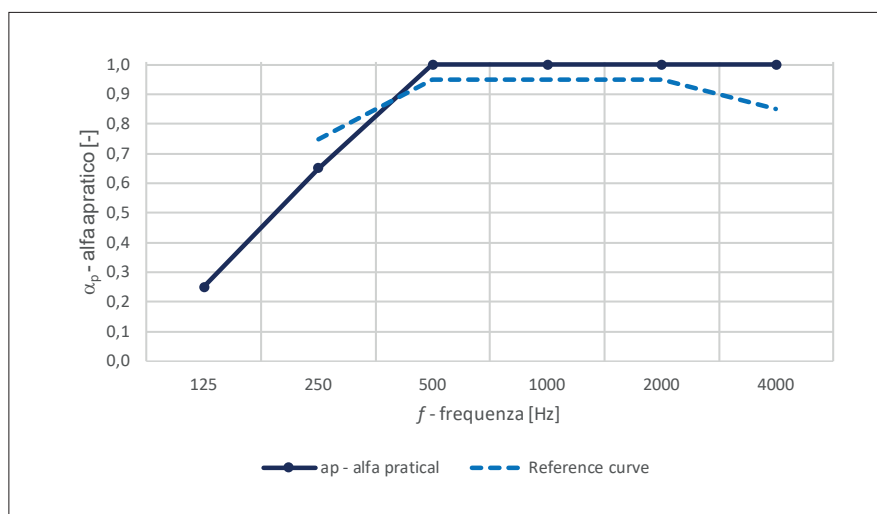

α_w	0,95 CLASSE A	Weighted sound absorption coefficient Sound absorption class	UNI EN ISO 11654
------------	------------------	---	------------------

DURABILITY



LIGHTWEIGHT



EASY TO HANDLE



EASY TO CLEAN*

*For optimal panel cleanliness, use a vacuum with a smooth nozzle (without brushing) or a dry microfiber cloth.

SPECIFICATION ITEM: ISOLSPACE STYLE WALL

One-sided sound absorbing panel for wall application, made of ISOLFIBTEC® (a special polyester technical textile fiber), engineered to achieve maximum sound-absorbing capacity and covered with polyester fabric. Can be applied visibly in rooms as a surface covering, by means of special supports (adhesive velcro and/or glue). Thickness approx. 45 mm.

Available in the rectangular version in the following sizes (50x70 cm, 70x100 cm, 100x140 cm, 140x200 cm) or in the circular version in the following sizes (Ø 45 cm, Ø 65 cm, Ø 85 cm, Ø 125 cm) or customised.

Finish color to be selected by the Construction Manager. Available in Black&White, Original or Pantone® versions.

Sound absorption coefficient $\alpha_w = 0.95$ (Class A), tested in a reverberation room with air gap according to the UNI EN ISO 354 standard.

Absence of volatile and harmful organic substances certified by achieving the highest score in VOC (A+) and Indoor Air Comfort (GOLD).

Product compliant with MEC (Minimum Environmental Criteria), with recycled content certified by a third-party organization.

Euroclass B-s1,d0 fire reaction certification.

CAUTIONS

This data sheet does not constitute a specification, and if it consists of multiple pages, please ensure you have reviewed the complete document. The guidelines provided reflect our expertise but serve as general recommendations only. Users assume full responsibility for determining product suitability for specific applications and any consequences of use.

Please be aware that panels may exhibit minor variations in thickness and dimensions due to the properties of the materials used in manufacturing

Isospace is a Tecnasfalti Group brand

LEGAL HEADQUARTERS

via dell'Industria, 12

Loc. Francolino

20074 Carpiano (MI)

OPERATIONAL OFFICE

via Aldo Moro, 12

Loc. Francolino

20074 Carpiano (MI)

T. +39 02 9885701

E. hello@isospace.it