


INDUSTRY COLLECTION

BAFFLE


INDUSTRY COLLECTION | BAFFLE

SIZES


Thickness approx. 50 mm



(50 x 140 cm)

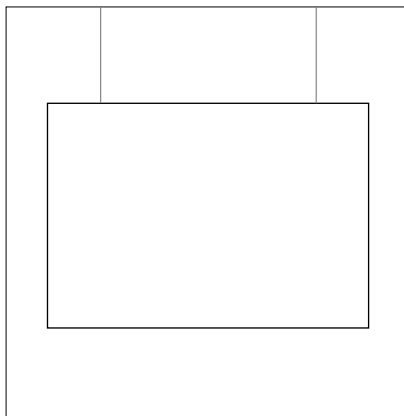


(70 x 100 cm)



(100 x 140 cm)

FINISH



Anthracite Grey



FLAME RESISTANCE

Euroclass B-s2,d0

VOLATILE ORGANIC COMPOUND EMISSION

VOC A+

Indoor Air Comfort GOLD



NO FORMALDEHYDE

CAM REQUIREMENTS

Complies with the requirements defined by CAM Edilizia for acoustic and thermal insulation materials regarding the demand for high acoustic absorption performance, recycled content percentage, and the absence of hazardous substances.



REMADE IN ITALY CERTIFICATE

REMADE IN ITALY certification is an ACCREDIA-accredited product certification that verifies the recycled content incorporated into each product. This certification is accepted during bidding and awarding phases, in compliance with public procurement regulations and Minimum Environmental Criteria (MEC) requirements.



100% RICICLABILE



ECO-FRIENDLY

ENVIRONMENTAL PROTOCOLS

Contributes to earning credits for the main environmental building certifications, such as the LEED, BREEAM, WELL, and ITACA protocols.

SHORT SUPPLY CHAIN

The entire lifecycle is managed within Italy, significantly reducing the environmental impact associated with transportation of raw materials, semi-finished products, and the final product.



MADE BY ITALIANS

HI-TECH MATERIALS

Industry Collection solutions are made of ISOLFIBTEC[®], a special polyester fibre that is completely non-toxic and non-allergenic, obtained from recycled PET. It is a material with a high sound absorption coefficient, environmentally friendly and long-lasting.



Every square meter of ISOLFIBTEC[®] is produced by recycling 39 PET bottles

CE MARKING


Isospace Industry has CE marking in accordance with UNI EN 13964.



SOUND ABSORPTION

Sound absorption measured in reverberation chamber (UNI EN ISO 354)

f [Hz]	Aobj [m ²]
Frequency	Equivalent absorption area
125	0,33
250	0,43
500	0,58
1000	0,73
2000	0,85
4000	1,00

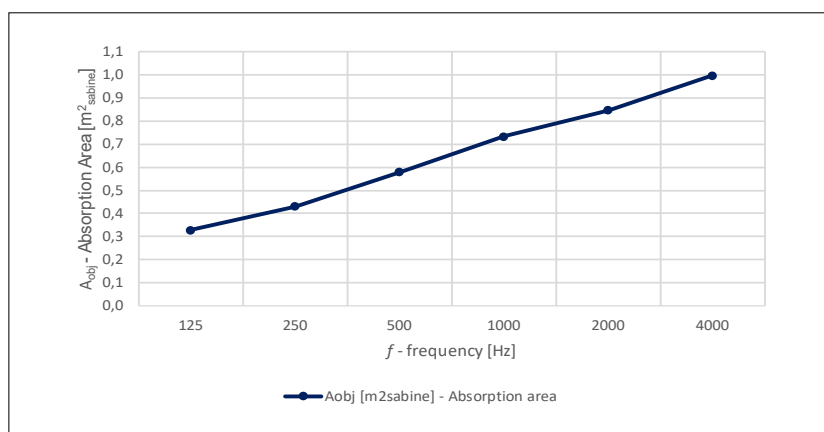

Test performed with panel size 70x100cm.

DURABILITY



LIGHTWEIGHT



EASY TO HANDLE



EASY TO CLEAN*

*For optimal panel cleanliness, use a vacuum with a smooth nozzle (without brushing) or a dry microfiber cloth.

SPECIFICATION ITEM: ISOLSPACE INDUSTRY

Sound-absorbing panel for ceiling application with baffle suspension installation method, consisting of ISOLFIBTEC© (special fibre made of technical polyester textiles), engineered for maximum sound-absorbing power.

Thickness approx. 50 mm. Characterised by Industry surface design.

Can be applied at sight in suspended ceiling environments by means of a special baffle hanging kit supplied already mounted on the panel.

Variable formats (50x140cm, 70x100cm and 100x140cm). Available in anthracite grey.

Tested in reverberation chamber as Discrete Object according to UNI EN ISO 354.

Absence of volatile and harmful organic substances certified by achieving the highest score in VOC (A+) and Indoor Air Comfort (GOLD).

Product compliant with MEC (Minimum Environmental Criteria), with recycled content certified by a third-party organization.

Euroclass B-s2,d0 fire reaction certification.

CAUTIONS

This data sheet does not constitute a specification, and if it consists of multiple pages, please ensure you have reviewed the complete document. The guidelines provided reflect our expertise but serve as general recommendations only. Users assume full responsibility for determining product suitability for specific applications and any consequences of use.

Please be aware that panels may exhibit minor variations in thickness and dimensions due to the properties of the materials used in manufacturing

Isospace is a Tecnasfalti brand

via dell'Industria, 12

Loc. Francolino

20074 Carpiano (MI)

T. +39 02 9885701

E. hello@isospace.it

isospace.com